


Ultra SpillDeck Plus Models®

Extra Rugged SpillDeck Plus Units Provide Containment For Heavy Equipment and Machinery



SPCC

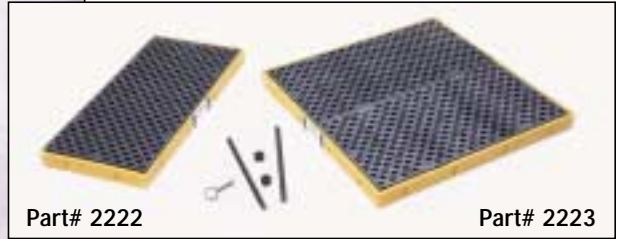

Part# 2222

Part# 2223

2- and 4-drum modules can be connected together with optional bulkhead fittings to increase overall sump capacity. A virtually unlimited number of configurations is available.

Note: Heavy-Duty Ramp (Part# 2353) is required for applications involving forklifts or tow motors.

U.S. Patent No. 5,562,047

ULTRA-SPILLDECK PLUS MODELS

| Ultra-SpillDeck Plus P2 Module | Ultra-SpillDeck Plus P4 Module | Ultra-SpillDeck Plus Loading Ramp |
|--|--|--|
| Part# 2222 | Part# 2223 | Part# 0438 |
| Dimensions: 54 1/2" x 27 1/4" x 4 1/4" | Dimensions: 54 1/2" x 54 1/2" x 4 1/4" | Dimensions: 37" x 26 1/2" x 4 1/4" |
| Weight: 56 lbs. | Weight: 104 lbs. | Weight: 78 lbs. |
| Load Rating: 10,000 lbs. /sq. ft. | Load Rating: 10,000 lbs. /sq. ft. | Load Capacity: 1,000 lbs. |
| Containment Capacity: 17 1/2 gallons | Containment Capacity: 35 gallons | Options: 26" T-Strip (2 required per long side) Bulkhead Fitting, Sidewall Plug |

Ultra SpillDeck Fluorinated Models®

Use Fluorinated SpillDecks With Chlorinated Solvents And Other Aggressive Chemicals That May Not Be Compatible With Standard Polyethylene



Part# 1326
6-Drum System



Part# 1324

Part# 1325

Part# 1323

ULTRA-SPILLDECK — FLUORINATED MODELS

| Ultra-SpillDeck P1 Fluorinated | Ultra-SpillDeck P2 Fluorinated | Ultra-SpillDeck P4 Fluorinated |
|--|--|--|
| Part# 1323 | Part# 1324 | Part# 1325 |
| Dimensions: 25 7/8" x 25 7/8" x 5 3/4" | Dimensions: 52" x 25 7/8" x 5 3/4" | Dimensions: 52" x 52" x 5 3/4" |
| Weight: 23 lbs. | Weight: 40 lbs. | Weight: 62 lbs. |
| Uniformly Distributed Load: 1,500 lbs. | Uniformly Distributed Load: 3,000 lbs. | Uniformly Distributed Load: 6,000 lbs. |
| Containment Capacity: 11 gallons | Containment Capacity: 22 gallons | Containment Capacity: 44 gallons |

Options: 26" T-Strip, Bulkhead Fitting, Sidewall Plug