




Low Profile, Modular SpillDecks Allow You To Design And Create A Containment System That Meets Your Specific Needs

- Polyethylene construction meets a wide range of chemical compatibility needs.
- Low profile, 5 3/4" height offers safe and convenient loading/unloading of drums.
- Applications include hazardous waste collection, storage of virgin chemicals, drum dispensing and battery storage.
- Optional Loading Ramps provide added drum handling safety and convenience.
- Meet EPA Container Storage Regulation 40 CFR 264.175 and Uniform Fire Code Spill Containment Regulations.



Ultra-SpillDecks are perfect for satellite collection of hazardous wastes. If drum containment needs should increase at some point in the future, simply connect additional modules to meet your needs!

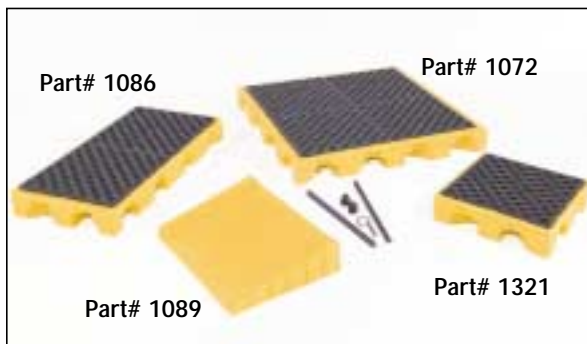

Connect your choice of 1, 2 and 4-drum SpillDeck modules to custom-design your own secondary containment storage pad.



The bulkhead fittings not only "lock" connected modules together, but allow spilled liquid to flow from one module to the next. Ultra-SpillDeck Containment Systems meet EPA and Uniform Fire Code Spill Containment Regulations when assembled in configurations of six (6) drums or more.

U.S. Patent No. 5,562,047

ULTRA-SPILLDECKS			
Ultra-SpillDeck P1 Module	Ultra-SpillDeck P2 Module	Ultra-SpillDeck P4 Module	Ultra-SpillDeck Loading Ramp
Part# 1321	Part# 1086	Part# 1072	Part# 1089
Dimensions: 25 7/8" x 25 7/8" x 5 3/4"	Dimensions: 52" x 25 7/8" x 5 3/4"	Dimensions: 52" x 52" x 5 3/4"	Dimensions: 24" x 32" x 5 3/4"
Weight: 23 lbs.	Weight: 40 lbs.	Weight: 62 lbs.	Weight: 17 lbs.
Uniformly Distributed Load: 1,500 Lbs.	Uniformly Distributed Load: 3,000 Lbs.	Uniformly Distributed Load: 6,000 Lbs.	Options: 26" T-Strip, 2 required/long side Bulkhead Fitting Sidewall Plug
Containment Capacity: 11 gallons	Containment Capacity: 22 gallons	Containment Capacity: 44 gallons	