

Amesil

Heavy duty tubing
and hose closure

Ame-Clamp



Sanitary
Reusable
Lightweight
Heavy Duty

The Ame-Clamp is a uniquely designed closure for tubing or hose that requires higher clamp pressures. Can be utilized with a variety of tubing and hose sizes. Quickly installed with a positive swing-away locking screw.

HIGH PURITY
POLYMER TECHNOLOGIES

AMESIL

209 Oak Ridge Road, Oak Ridge, NJ 07438
Phone: 973-697-4100 • Fax: 973-697-4175

Visit our web site: www.amesil.com

Ame-Clamp


Sanitary Smooth contours provide cleanability. Clamp may be autoclaved or gamma irradiated. It is also resistant to most chemicals and can be completely disassembled without the use of tools.

Reusable Due to unique durability characteristics, the Ame-Clamp may be continually reused.

Lightweight The Ame-Clamp is lightweight as well as offering durability, high-strength, and compatibility with online applications

Heavy Duty High-strength polymer technology with a unique design that allows the Ame-Clamp to be utilized in a variety of applications from tubing to hose. Meets working pressure of tubing and hose.

General Specifications
A. Recommended tubing and hose materials <ul style="list-style-type: none">■ Silicone■ Amepreme■ C-Flex■ PVC
B. Material: Polysulfone <ul style="list-style-type: none">■ Autoclavable up to 30 cycles■ Gamma Radiate up to 50 kilograys■ FDA compliant material
C. Recommended tubing and hose range <ul style="list-style-type: none">■ Unreinforced tubing from .090 to .190 wall thickness■ Reinforced braided hose from .090 to .180 wall thickness

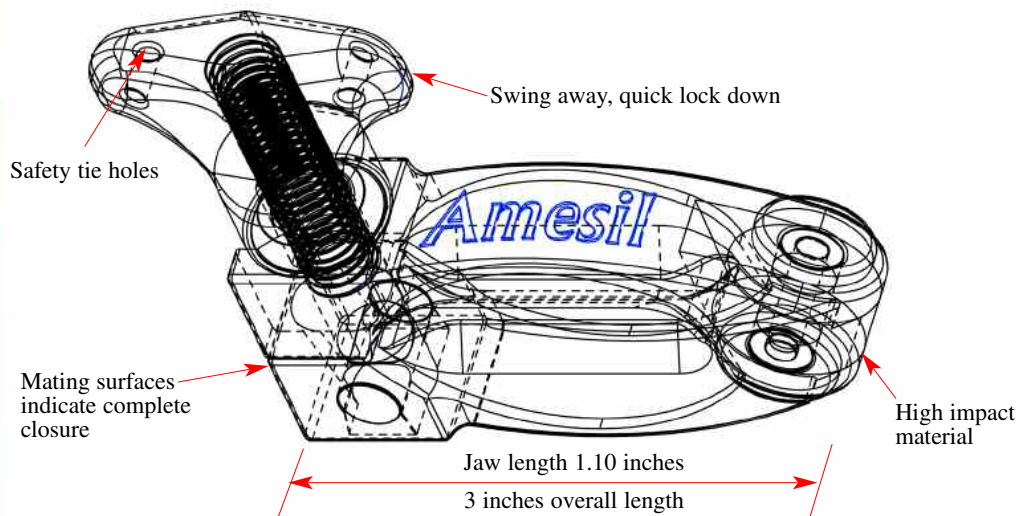

Note: Differences may occur due to the durometer and density of various materials that may affect the functionality of the clamp. Tubing or hose should be properly aligned within jaw length for proper closure.

HIGH PURITY
POLYMER TECHNOLOGIES

AMESIL

209 Oak Ridge Road, Oak Ridge, NJ 07438
Phone: 973-697-4100 • Fax: 973-697-4175

Visit our web site: www.amesil.com